

Air filter: type REPLACEABLE ELEMENT

No. fitted ONE

Inlet manifold:


Diameter of flange hole at carburettor 40

m.m.


Diameter of flange hole at port MANIFOLD INTEGRAL WITH HEAD

m.m.

Photograph of combustion chamber to be affixed here.

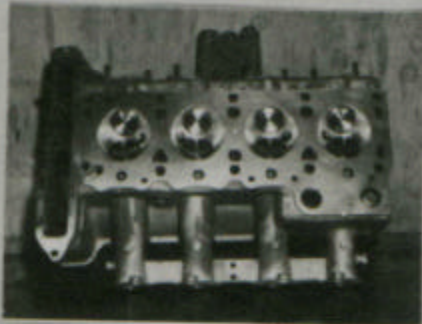

Photograph of inlet manifold to be affixed here.

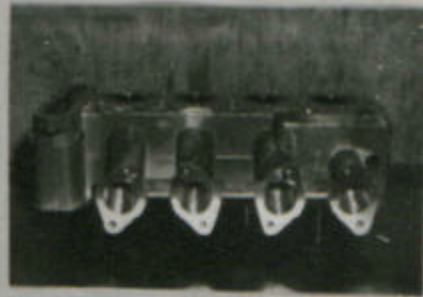

Exhaust manifold:

Diameter of flange hole at port 34

m.m.

Diameter of flange hole at connection to silencer inlet pipe 38


m.m.

m.m.

Photograph of piston showing crown to be affixed here.



Photograph of exhaust manifold to be affixed here.

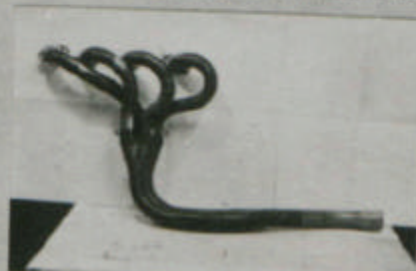

ENGINE ACCESSORIES

Make of fuel pump	<u>A.C.</u>	No. fitted	<u>ONE</u>
Method of operation	<u>MECHANICAL</u>		
Type of ignition system	<u>COIL</u>		
Make of ignition	<u>LUCAS</u>	Model	<u>DISTRIBUTOR 25D4</u> coil or magneto
Method of advance and retard	<u>CENTRIFUGAL</u>		
Make of ignition coil	<u>LUCAS</u>	Model	<u>45102 H</u>
No. of ignition coils	<u>ONE</u>	Voltage	<u>12V.</u>
Make of dynamo	<u>LUCAS/FORD</u>	Model	<u>C.40</u>
Voltage of dynamo	<u>12V.</u>	Maximum output	<u>19</u> amps.
Make of starter motor	<u>LUCAS/FORD</u>	Model	<u>M.35 G.</u>
Battery: No. fitted	<u>ONE</u>	Voltage	<u>12V.</u>
Oil Cooler (if fitted) type	<u>OPTIONAL EXTRA</u>	Capacity	<u>38</u> amp. hour
		Capacity	<u>1</u> pints